


The Belt Driven Spindle for Machining Centre

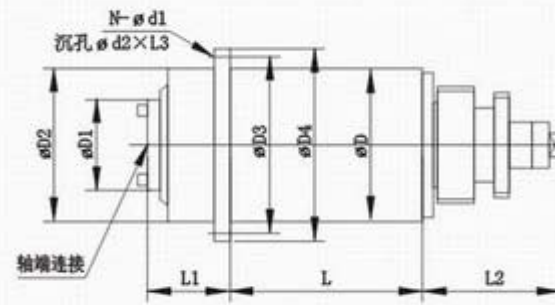

Spindle type	Speed (r/min)	Dimensions(mm)										Joint of spindle nose		Bearings type	Character
		D	D1	D2	D3	D4	L	L1	L2	N-d1	d2×L3				
APX1240-06	6000	120	78	130	146	165	170	128	90	6-Φ9	Φ14×8	BT40 taper hole	5.5	4×B7011AC/P4 2×B7011AC/P5	Belt driven type Change tool by hand
AP1240-06	6000	120	76	120	145	165	156	145	123	6-Φ9	Φ15×8	BT40 taper hole	5.5	4×B7011AC/P4 2×B7011AC/P5	Belt driven type and broaching tool
AP1230-10	10000	120	69.82	120	144	177	240	100	200	6-Φ11	Φ17×11	BT30 taper hole	5.5	3×B7010C/P4 2×B7009C/P4	Belt driven type and broaching tool
AP1430-08	8000	140	69.82	140	164	187	250	110	200	6-Φ11	Φ17×11	BT30 taper hole	5.5	3×B7012C/P4 2×B7010C/P4	Belt driven type and broaching tool
AP1440-06	6000	140	88.8	140	164	187	245	135	212	8-Φ11	Φ17×11	BT40 taper hole	7.5	4×B7014C/P4 2×B7012C/P4	Belt driven type and broaching tool
AP1440-08	8000	140	88.8	140	164	187	245	135	212	8-Φ11	Φ17×11	BT40 taper hole	7.5	3×B7013C.T.P4S 3×B7011C.T.P4S	Belt driven type and broaching tool
AP1550-05	5000	150	128.6	160	170	190	280	75	190	8-Φ9	Φ14×10	BT50 taper hole	7.5	4×B7015C/P4 2×B7013C/P4	Belt driven type and broaching tool
AP1540-08	8000	150	88.88	160	180	200	200	137	232	8-Φ11	Φ17×10	BT40 taper hole	7.5	4×B7014C/P4 2×B7012C/P4	Belt driven type and broaching tool
AP2150-03	3000	210	128.6	210	230	250	398	62	158	8-Φ9	-	Xt50 taper hole	11	4×7021C/P4 2×7018C/P4	Belt driven type and broaching tool
AP2150-03A	3000	210	128.6	210	260	290	440	90	267	4-Φ17.5	Φ26×20	IS050 taper hole	11	4×B7020C/P4 2×B7018C/P4	Belt driven type and broaching tool
AP2350-01	1000	190	128.6	230	265	300	208	340	42	6-Φ18	Φ26×16	IS050 taper hole	15	3×B7220C/P4 2×6217/P5	Rigid type and broaching tool
AP1240-08	8000	120	76	120	146	165	170	135	125	6-Φ9	Φ15×10	BT40 taper hole	5.5	3×7011C/P4 2×7009C/P4	Belt driven type and broaching tool
AP3050-01	1000	250	129	270	305	340	540	155	368	12-Φ13	Φ18×12	IS050 taper hole	-	318216/226 318214	Belt driven type and broaching tool
AP1540-08G	8000	150	84	155	180	202	192	138	181	8-Φ11	Φ17×11	BT40 taper hole	7.5	2×7014CTDB/P4 2×7012CTDB/P4	Belt driven type and broaching tool
AP1240-08G	8000	120	78	130	146	165	165	128	135	6-Φ9	Φ14×8	BT40 taper hole	5.5	2×7012C/P4 2×7010C/P4	Belt driven type and broaching tool

Contact Us:

Anyang General International Co.,Ltd

Add: Suite A, 4/F Jinhao Business Bld., Renmin Rd., Anyang, Henan, P.R.C.

Zip Code: 455000

Tel: (86) 372 5965148

Fax: (86) 372 5951936

[Http://www.gcmachines.com](http://www.gcmachines.com)

E-mail: info@agico.com.cn