



The High Frequency Spindle for Machine Centre and Parallel Lathe

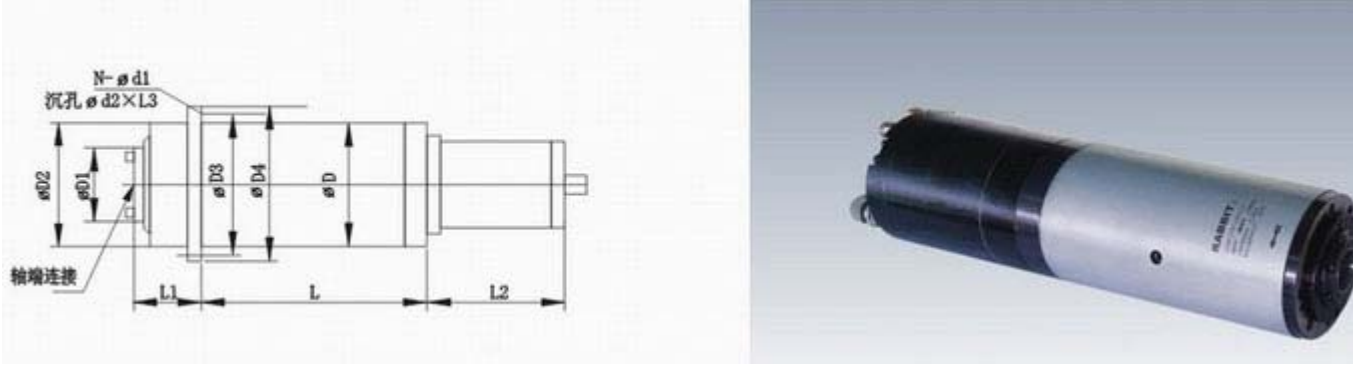

Spindle type	Speed (r/min)	KW	V	A	Hz	Lub	Cool	Joint of spindle nose	Bearing type	Character
ADS0820-30Z/1.8	30000	1.8	220	7	500	Grease	Water	IS020taper hole	2×B7005C/P4 1×7003C/P4	Have sensor and broaching tool
ADS1130-18Z/3.2	18000	3.2	220	11.6	300	Grease	Water	BT30taper hole	2×B7007C/P4 1×7005C/P4	Have sensor and broaching tool
ADS1130-18Z/3.2J	18000	3.2	220	11.6	300	Grease	Water	BT30taper hole	2×B7007C/P4 1×7005C/P4	Have encoder and broaching tool
ADS1230-24Z/5	24000	5	350	10.5	400	Grease	Water	BT30taper hole	2×B7007C/P4 2×7005C/P4	Have sensor and broaching tool
ADS1430-4-12Z/1.5	4000	1.5	220	5.7	133	Grease	Water	BT30taper hole	2×VEX55/P4	Have sensor and broaching tool
	12000		380		400				2×VEX40/P4	
ADS1425-18/3	18000	3.6	350	8.5	600	Grease	Water	IS025taper hole	2×B7008C/P4 2×7008C/P4	Have broaching tool
ADS1530-18Z/7.3	18000	7.3	293	19	300	Grease	Water	BT30taper hole	2×7007C/P4 2×7006C/P4	Have sensor and broaching tool
ADS1530-18Z/7.3J	18000	7.3	293	19	300	Grease	Water	BT30taper hole	2×7007C/P4 2×7006C/P4	Have encoder and broaching tool
ADS1520-24Z/7.3	24000	7.3	293	19	400	Grease	Water	IS020 锥孔	2×7006C/P4 2×7005C/P4	Have sensor and broaching tool
ADS1640-6Z/6	6000	6	380	11.7	200	Grease	Water	BT40taper hole	3×7014C/P4 2×7210C/P4	Have sensor and broaching tool
ADS1740-2Z/2.2	2000	2.2	350	5.9	66.7	Grease	Water	BT40taper hole	3×B7015C/P4 2×7011C/P4	Have encoder and broaching tool
ADS1740-3-9Z/3.7J	3000	3.7	220	12.5	100	Grease	Water	BT40taper hole	2×VEX65/P4	Have encoder and broaching tool
	9000		380	11.3	300				2×E250/P4	
ADS1740-8Z/6	8000	6	350	12.8	267	Grease	Water	BT40taper hole	2×7014CAT/P4 2×7209CAT/P4	Have sensor and broaching tool
ADS2040-3-10/5.5	3000	5.5	220	19.4	100	Grease	Water	BT40taper hole	3×VEX65/P4	Have encoder and broaching tool
	10000		380		300				2×VEX55/P4	
ADS2040-3-10/7.5	3000	7.5	208	25	100	Grease	Water	BT40taper hole	3×VEX65/P4	Have encoder and broaching tool
	10000		380		333				2×VEX55/P4	
ADS2940-1.5-10/11	1500	11	220	42	100	Grease	Water	BT40taper hole	3×VEX65/P4	Have encoder and broaching tool
	10000		380		333				2×VEX55/P4	
ADS2940-1.5-10/15	1500	15	220	56	100	Grease	Water	BT40taper hole	3×VEX65/P4	Have encoder and broaching tool
	1000		380		333				2×VEX55/P4	

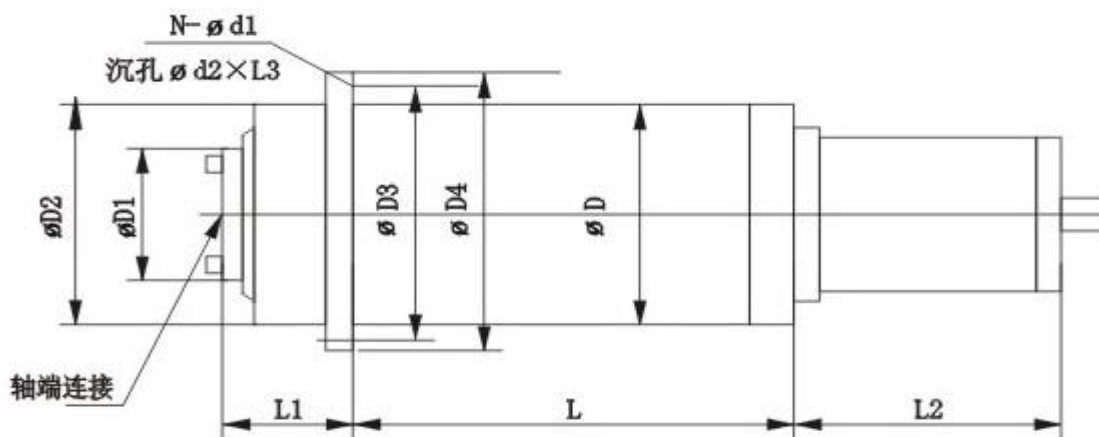

Spindle type	Dimensions(mm)									
	D	D1	D2	D3	D4	L	L1	L2	N-d1	D2×L3
ADS0820-30Z/1.8	80	25	60	--	--	312	--	--	--	--
ADS1130-18Z/3.2	110	34	108	--	--	217	--	--	--	--
ADS1130-30Z/3.2J	110	34	83	--	--	238	--	--	--	--
ADS1230-24Z/5	120	34	119	140	165	335.5	50	--	--	--
ADS1430-4-12Z/15	140	53.3	140	160	180	325	70	90	8-Φ9	Φ14×9
ADS1425-18/3	140	37	95	163	186	208	87	108	6-Φ9	Φ13.5×9
ADS1530	150	34	100	--	--	231	50.5	114	--	--
ADS1530-18Z/7.3J	150	34	100	--	--	231	50.5	144	--	--
ADS1520-24Z/7.3	150	28	112	--	--	254	34	110	--	--
ADS1640-6Z6	160	68	160	180	202	345	150	111	6-Φ11	Φ17×12
ADS1740-2Z/2.2	170	72	--	195	230	655	65	124	8-Φ11	Φ17×12
ADS1740-3-9Z/3.7J	170	62	143	195	230	479	153	181	6-Φ12	Φ18×10
ADS1740-8Z/6	170	68	150	190	210	274	130	111	6-Φ11	Φ18×11
ADS2040-3-10/5.5	200	63	145	225	250	405	135	124	6-Φ13	Φ19×13
ADS2040-3-10/7.5	200	63	145	225	250	445	135	124	6-Φ13	Φ19×13
ADS2940-15-10/11	290	68	180	315	340	375	135	124	6-Φ13	Φ19×13
ADS2940-1.5-10/15	290	68	180	315	340	405	135	124	6Φ13	Φ19×13

Contact Us:

Anyang General International Co.,Ltd

Add: Suite A,4/F Jinhao Business Bld.,Renmin Rd.,Anyang, Henan,P.R.C.

Zip Code:455000

Tel: (86) 372 5965148

Fax: (86) 372 5951936

[Http://www.gcmachines.com](http://www.gcmachines.com)

E-mail: info@agico.com.cn